



Non-Plug Single Phase Isolated Front End (IFE) Outline Drawings

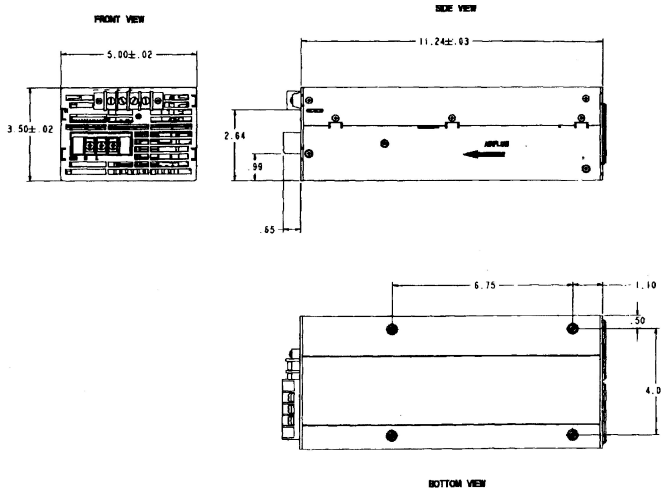


J1 PIN
LOCATIONS

Option Connector Pinouts:

- Pin 1: Remote Sense (+)
- Pin 2: Remote Margin
- Pin 3: Output Power Good
- Pin 4: Remote Sense
- Pin 14: Logic Return
- Pin 15: Current Sharing
- Pin 16: Power Fail
- Pin 17: Current Monitor
- Pin 18: Logic Inhibit

Hot Plug Single Phase Isolated Front End (IFE) Outline Drawings

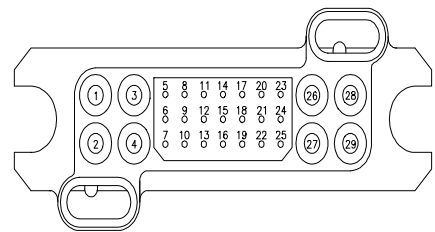

Elcon Lower Drawer Connector:

- | | |
|-------------------------|-----------------------|
| Pin 1: AC Input (N) | Pin 21: AC Power Fail |
| Pin 2: AC Input (L) | Pin 22: DC Good |
| Pin 3: Chassis Ground | Pin 23: Sense + |
| Pin 4: Chassis Ground | Pin 25: Sense - |
| Pin 5: Unit Present | Pin 26: Output + |
| Pin 7: Unit Present | Pin 27: Output - |
| Pin 17: Current Share | Pin 28: Output + |
| Pin 18: Current Monitor | Pin 29: Output - |
| Pin 19: Logic Return | |
| Pin 20: Logic Inhibit | |

Pins 6, 8-16 and 24: Spares

Cat IFE, 1200W, Non-Plug / Hot Plug, Outline Drawings, 11/08/00