
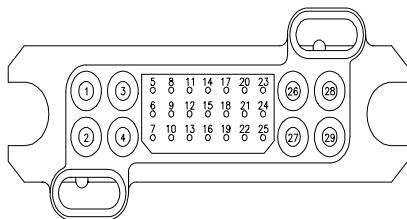


**Hot Plug Single Phase Isolated Front End (IFE) Outline Drawings**  
**Elcon Lower Drawer Connector**

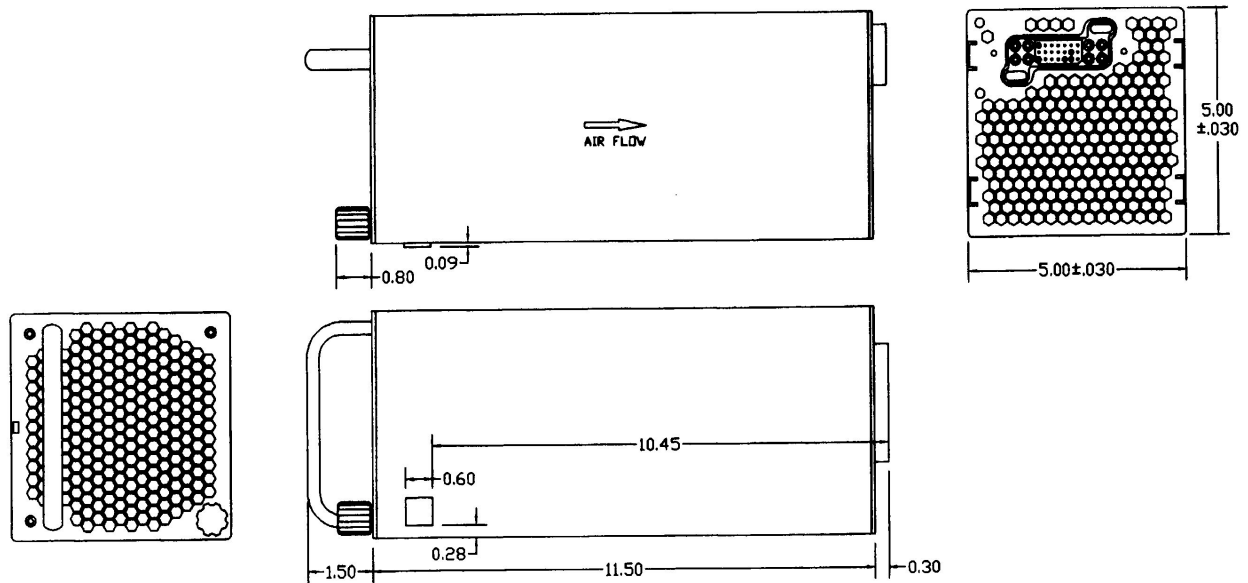

**Elcon Lower Drawer Connector:**

Pin 1: AC Input (N)	Pin 21: AC Power Fail
Pin 2: AC Input (L)	Pin 22: DC Power Good
Pin 3: Chassis Ground	Pin 23: Sense +
Pin 4: Chassis Ground	Pin 25: Sense -
Pin 5: Unit Present	Pin 26: Output +
Pin 7: Unit Present	Pin 27: Output -
Pin 17: Current Share	Pin 28: Output +
Pin 18: Current Monitor	Pin 29: Output -
Pin 19: Logic Return	
Pin 20: Logic Inhibit	

*Pins 6, 8-16 and 24 are Spares.*

Cat IFE, 1kW to 3kW, Hot Plug, Outline Drawings, 11/8/00