
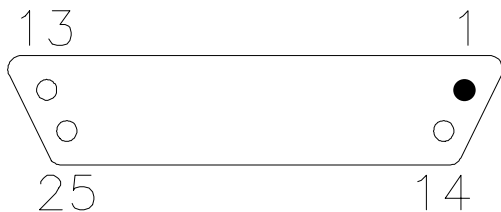


240/480VAC Strappable Isolated Front End (IFE)
Two Single Phase AC Input Terminal Blocks & Two Output Bus Bars

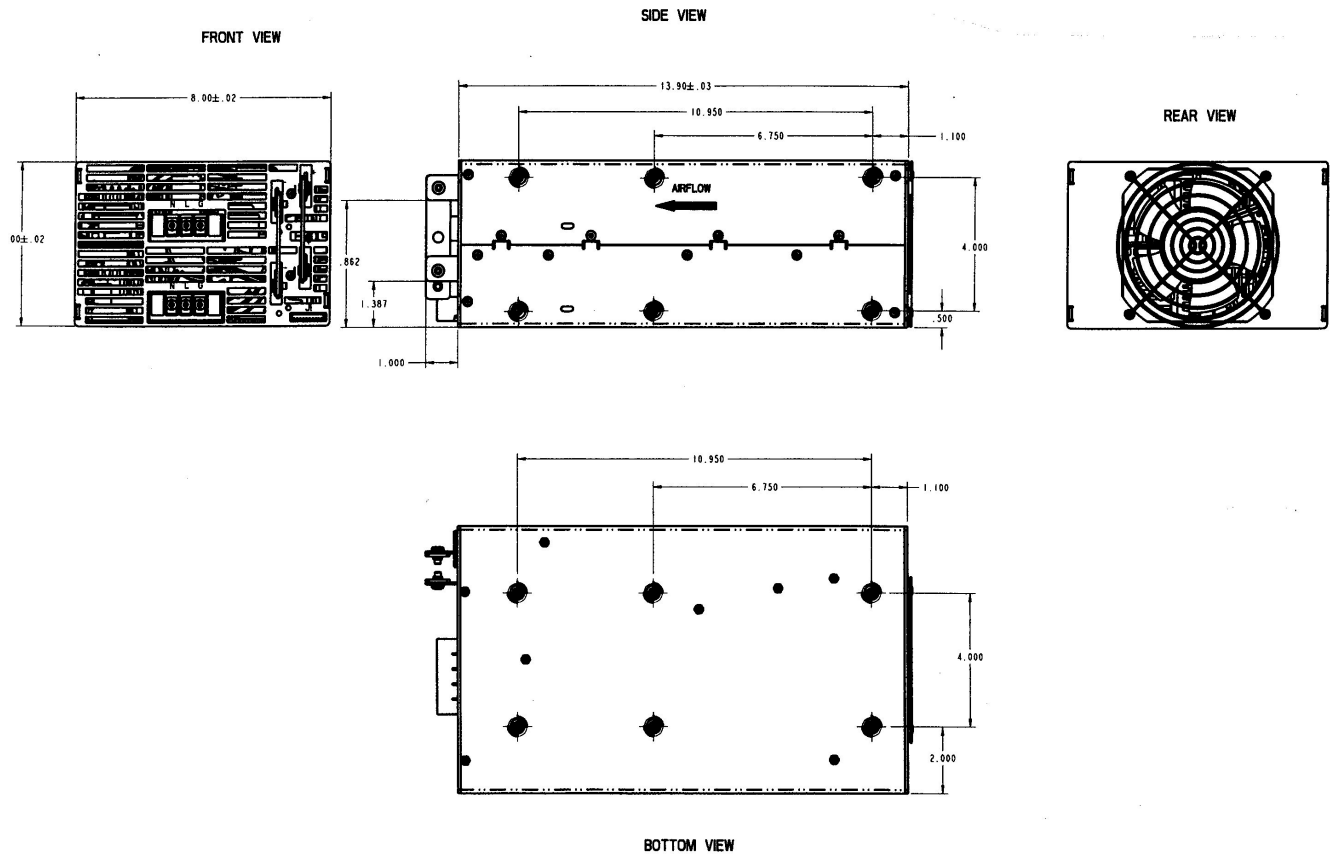

J1 PIN
LOCATIONS

Option Connector Pinouts:

- Pin 1: Remote Sense (+)
- Pin 2: Remote Margin
- Pin 3: Output Power Good
- Pin 4: Remote Sense
- Pin 14: Logic Return
- Pin 15: Current Sharing
- Pin 16: Power Fail
- Pin 17: Current Monitor
- Pin 18: Logic Inhibit

Cat IFE, 4kW to 5kW, 480VAC, Outline Drawings, 11/8/00