



FEATURES

- Wide-Range Input Voltage
- Industry-Standard Pin Out
- Adjustable Output Voltage (60% - 110%)
- Remote ON/OFF
- Remote Sense
- Constant Frequency
- Thermal Shutdown
- High Power Density (Up to 54.8 W/in³)

SPECIFICATIONS

INPUT

Voltage/Current	See Model Selection Table
Max. Input Current	6.0 A
	($V_{in} = 0$ to 72 VDC)
Max. Inrush Transient	2.0 A ² s
Reflected Ripple Current	20 mA (peak-to-peak)
Ripple Rejection	60 dB

OUTPUT

Output Voltage	See Model Selection Table
Set Point	±1%
Regulation	
Line	0.01% (typ.)
Load	0.05% (typ.)
Ripple (RMS)	
3.3V, 5V	40 mV
12V, 15V	80 mV
Noise (peak-to-peak)	
3.3V, 5V	100 mV
12V, 15V	150 mV
	(measured with a 20 MHz bandwidth)
Temperature Drift	±0.01%/°C
Overvoltage Protection	120%
Current Limit Inception	115%
Short Circuit Current	130%
Efficiency	See Model Selection Table

Isolation

Voltage	500 VDC
Capacitance	2000 pf
Resistance	> 10 MV

ENVIRONMENTAL

Operating Case Temp.	−40 to +100°C
Storage Temp.	−40 to +110°C


MECHANICAL

Size (W x D x H)	2.40 x 2.28 x 0.50 inches
	(61 x 58 x 13 mm)
Weight	3.5 oz. (99 g)


See drawing on page 110

MODEL SPECIFICATIONS

Output		Input Range 48 (36-72) VDC	
Volts	Amps	Model	Effic.
2.0 VDC	0 - 30A	HWG02030	71%
3.3 VDC	0 - 30A	HWG03030	80%
5.0 VDC	0 - 30A	HWG05030	84%
12.0 VDC	0 - 12.5A	HWG12013	87%
15.0 VDC	0 - 10A	HWG15010	88%
24.0 VDC	0 - 6.25A	HWG246R3	88%

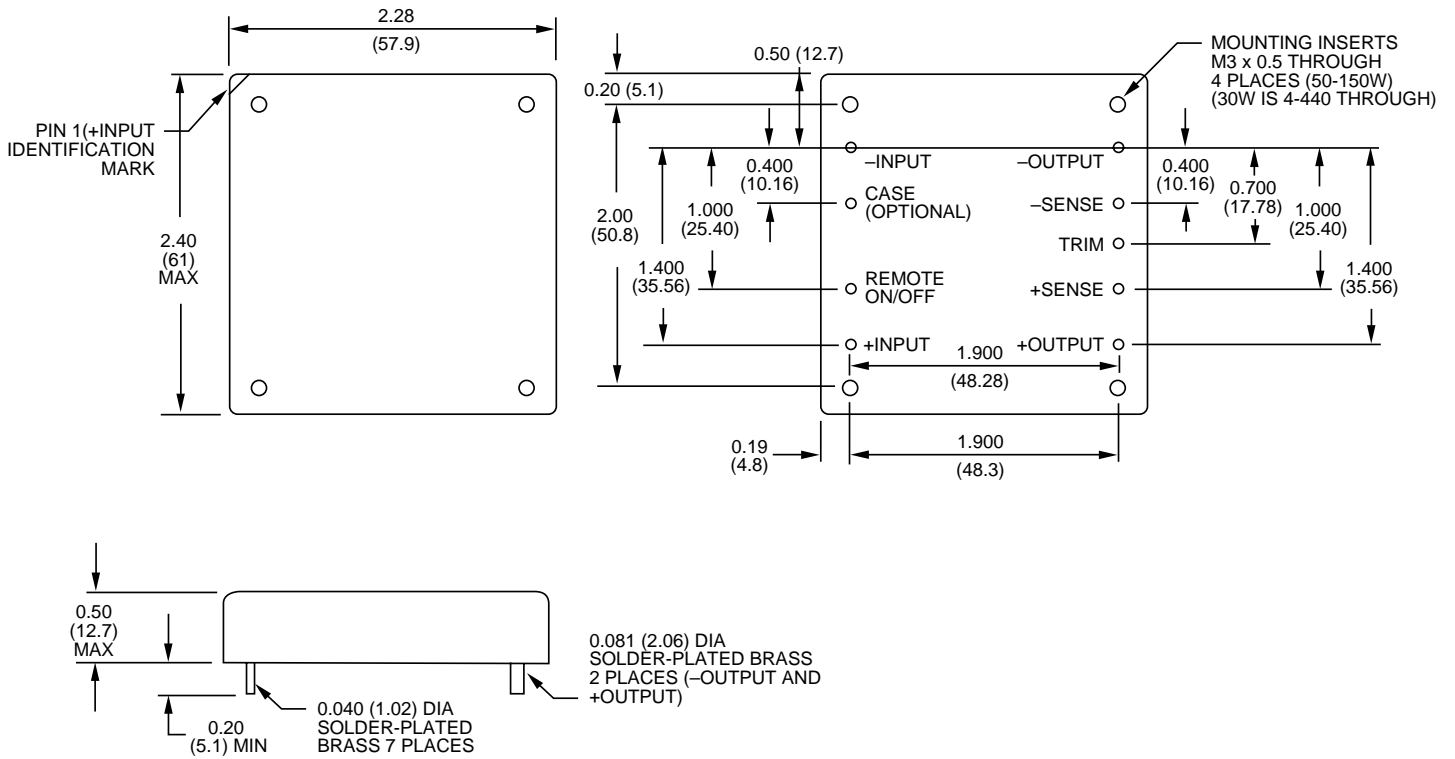

RECOMMENDED HOLE PATTERN

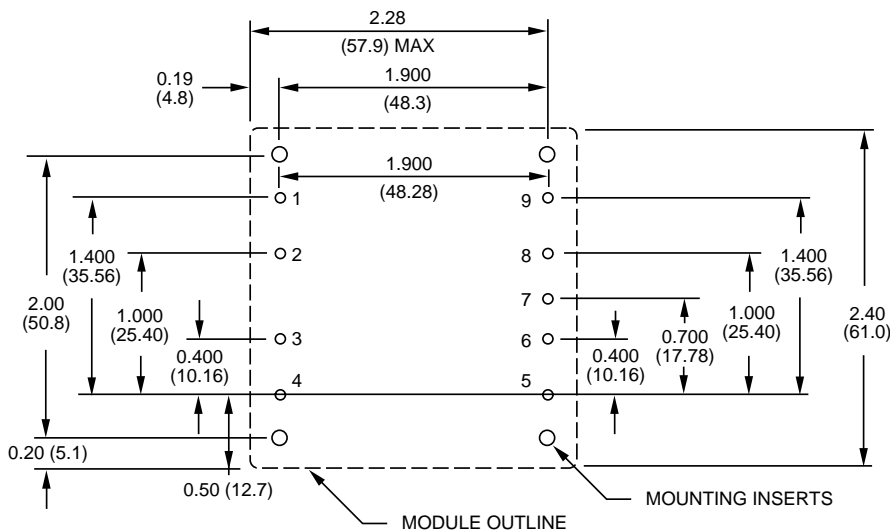

Dimensions in inches; () Dimensions in mm.